

# TEST REPORT

**Application No.:** SHEM2503001216HS  
**Applicant:** Notio Living A/S  
**Address of Applicant:** Nygade 12 Holstebro 7500 Denmark  
**Manufacturer:** ANJI SHENGXING OFFICE FURNITURE CO., LTD  
**Address of Manufacturer:** TANGPU INDUSTRIAL PARK, ANJI COUNTY, ZHEJIANG PROVINCE, CHINA  
**Factory:** ANJI SHENGXING OFFICE FURNITURE CO., LTD  
**Address of Factory:** TANGPU INDUSTRIAL PARK, ANJI COUNTY, ZHEJIANG PROVINCE, CHINA

**Equipment Under Test (EUT):**  
**EUT Name:** Skaane sofa  
**Model No.:** DOT-Z-290018A  
**Standard(s) :** EN 61000-3-3: 2013+ A1:2019+A2:2021  
EN IEC 55014-1: 2021  
EN IEC 61000-3-2: 2019+A1:2021+A2:2024  
EN IEC 55014-2: 2021

**Date of Receipt:** 2025-03-03  
**Date of Test:** 2025-03-07  
**Date of Issue:** 2025-04-03

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Member of the SGS Group (SGS SA)





# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250300121601

Page: 2 of 40

Revision Record			
Version	Description	Date	Remark
00	Original	2025-04-03	/

<b>Authorized for issue by:</b>			
<b>Tested By</b>			
	Leo Xu/Project Engineer		
<b>Approved By</b>			
	Parlam Zhan / Reviewer		

## 2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	EN IEC 55014-1:2021	CISPR 16-2-1:2014+A1:2017	Table 5	Pass
Disturbance Power		CISPR 16-2-2:2010	Table 7 & 8	Pass
Harmonic Current Emission	EN IEC 61000-3-2:2019+A1:2021+A2:2024	EN IEC 61000-3-2:2019+A1:2021+A2:2024	N/A	N/A*
Voltage Fluctuations and Flicker	EN 61000-3-3:2013+A1:2019+A2:2021	EN 61000-3-3:2013+A1:2019+A2:2021	Clause 5	Pass

N/A\*: Not applicable, please refer to section 6.3 of this report for more details.

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	EN IEC 55014-2:2021	EN 61000-4-2:2009	4kV Contact Discharge, 8kV Air Discharge	Pass
Radiated Immunity (80MHz-1GHz)		EN IEC 61000-4-3:2020	3V/m, 80%, 1kHz Amp. Mod.	Pass
Electrical Fast Transients Burst at AC Mains Power Port		EN 61000-4-4:2012	1kV, 5/50ns Tr/Td, 5kHz Repetition Frequency	Pass
Surge at AC Mains Power Port		EN 61000-4-5:2014+A1:2017	1.2/50µs Tr/Td, 1kV Line to Line	Pass
Conducted Immunity at AC Mains Power Port (150kHz-80MHz)		EN 61000-4-6:2014	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage Dips and Interruptions		EN IEC 61000-4-11:2020	For 50Hz: 0 % UT for 0.5cycle, 40 % UT for 10cycles, 70 % UT for 25cycles; For 60Hz: 0 % UT for 0.5cycle, 40 % UT for 12cycles, 70 % UT for 30cycles, UT is Supply Voltage	Pass

### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 Test Summary</b> .....	<b>3</b>
<b>3 Contents</b> .....	<b>4</b>
<b>4 General Information</b> .....	<b>6</b>
4.1 Details of E.U.T. ....	6
4.2 Description of Support Units.....	6
4.3 Measurement Uncertainty & Decision Rule.....	6
4.4 Test Location .....	7
4.5 Test Facility .....	7
4.6 Deviation from Standards .....	7
4.7 Abnormalities from Standard Conditions .....	7
4.8 EMS Monitor .....	7
<b>5 Equipment List</b> .....	<b>8</b>
<b>6 Emission Test Results</b> .....	<b>12</b>
6.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz) .....	12
6.1.1 E.U.T. Operation .....	12
6.1.2 Test Mode Description .....	12
6.1.3 Test Setup Diagram .....	12
6.1.4 Measurement Procedure and Data .....	12
6.2 Disturbance Power .....	15
6.2.1 E.U.T. Operation .....	15
6.2.2 Test Mode Description .....	15
6.2.3 Test Setup Diagram .....	15
6.2.4 Measurement Procedure and Data .....	15
6.3 Harmonic Current Emission.....	17
6.4 Voltage Fluctuations and Flicker .....	18
6.4.1 E.U.T. Operation .....	18
6.4.2 Test Mode Description .....	18
6.4.3 Test Setup Diagram .....	18
6.4.4 Measurement Procedure and Data .....	18
<b>7 Immunity Test Results</b> .....	<b>19</b>
7.1 Electrostatic Discharge .....	20
7.1.1 Test Setup Diagram .....	20
7.1.2 E.U.T. Operation .....	20
7.1.3 Test Mode Description .....	20
7.1.4 Test Condition and Results: .....	20
7.2 Radiated Immunity (80MHz-1GHz) .....	22
7.2.1 Test Setup Diagram .....	22
7.2.2 E.U.T. Operation .....	22
7.2.3 Test Mode Description .....	22
7.2.4 Test Condition and Results: .....	22
7.3 Electrical Fast Transients Burst at AC Mains Power Port .....	23
7.3.1 Test Setup Diagram .....	23
7.3.2 E.U.T. Operation .....	23
7.3.3 Test Mode Description .....	23
7.3.4 Test Condition and Results: .....	23
7.4 Surge at AC Mains Power Port.....	24
7.4.1 Test Setup Diagram .....	24



# SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHEM250300121601

Page: 5 of 40

7.4.2	E.U.T. Operation .....	24
7.4.3	Test Mode Description .....	24
7.4.4	Test Condition and Results: .....	24
7.5	Conducted Immunity at AC Mains Power Port (150kHz-80MHz) .....	25
7.5.1	Test Setup Diagram .....	25
7.5.2	E.U.T. Operation .....	25
7.5.3	Test Mode Description .....	25
7.5.4	Test Condition and Results: .....	25
7.6	Voltage Dips and Interruptions .....	26
7.6.1	Test Setup Diagram .....	26
7.6.2	E.U.T. Operation .....	26
7.6.3	Test Mode Description .....	26
7.6.4	Test Condition and Results: .....	26
<b>8</b>	<b>Test Setup Photo.....</b>	<b>28</b>
<b>9</b>	<b>EUT Constructional Details (EUT Photos) .....</b>	<b>33</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC29V Power Supply:DOT-Z-290018A Input:100-240V~,50/60Hz,2.5A Output:DC29V,1.8A,52.2W Sample No.: SHEM2503001216HS-M1 Test Voltage:AC230V50Hz
Maximum Clock Frequency:	16MHz

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty & Decision Rule

#### Measurement Uncertainty:

No.	Item	Measurement Uncertainty ( $U_{Lab}$ )	$U_{CISPR}$
1	Conducted Emission at mains port using AMN	3.4dB (9kHz to 150kHz)	3.8dB (9kHz to 150kHz)
		2.9dB (150kHz to 30MHz)	3.4dB (150kHz to 30MHz)
2	Conducted Emission at mains port using VP	2.2dB (9kHz to 30MHz)	2.9dB (9kHz to 30MHz)
3	Conducted Emission at telecommunication port using AAN	4.6dB (150kHz to 30MHz)	5.0dB (150kHz to 30MHz)
4	Radiated Power	3.4dB (30MHz to 300MHz)	4.5dB (30MHz to 300MHz)
5	Radiated emission	5.7dB (30MHz-1GHz)	6.3dB (30MHz-1GHz)
		4.8dB (1GHz-6GHz)	5.2dB (1GHz-6GHz)
		5.0dB (6GHz-18GHz)	5.5dB (6GHz-18GHz)
6	Radiated disturbance (disturbance current in a LLAS)	2.6dB (9kHz to 30MHz)	3.3dB (9kHz to 30MHz)

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### Decision Rule:

- CISPR 16-4-2 for emission measurements is as below described.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

$U_{LAB}$  less than  $U_{CISPR}$ , therefore:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab  
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China  
Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.  
Company Number: 8617A

• **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

#### 4.8 EMS Monitor

Visual: Working status of EUT.

## 5 Equipment List

<b>Conducted Emissions at AC Mains Power Port (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2024/12/18	2025/12/17
Line impedance stabilization network	SCHWARZBECK	NSLK8127	SHEM061-1	2024/12/18	2025/12/17
Line impedance stabilization network	EMCO	3816_2	SHEM019-1	2024/12/18	2025/12/17
Pulse limiter	Rohde & Schwarz	ESH3-Z2	SHEM029-1	2024/12/18	2025/12/17
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2026/12/18
CE test Cable	/	/	SHEM172-2	2024/12/18	2025/12/17
Passive Voltage probe	Rohde & Schwarz	ESH2-Z3	SHEM028-2	2024/12/18	2025/12/17
Capacitive Voltage Probe	SCHWARZBECK	CVP9222 B	SHEM169-1	2024/07/31	2025/07/30
Current Probe	SCHWARZBECK	SW9605	SHEM170-1	2024/07/31	2025/07/30
Test Software	ESE	e3	Version: 6.191211	N/A	N/A
3 Phase LISN	SCHWARZBECK	NNLK 8129 RC	SHME035-4	2024/09/19	2025/09/18
3 Phase LISN	Beijing Kehuan	KH3765-100	SHEM292-1	2024/07/31	2025/07/30

<b>Disturbance Power</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI test receiver	Rohde & Schwarz	ESR7	SHEM162-1	2024/12/18	2025/12/17
Absorbing clamp	LUTHI	MDS21	SHEM014-1	2024/12/18	2025/12/17
DE coupling clamp	LUTHI	FTC101	SHEM027-2	N/A	N/A
Attenuator	HUAXIANG	TS2-6dB-2G-B	SHEM208-1	2024/12/18	2025/12/17
Shielding Room	ZHONGYU	8*4*3M	SHEM079-2	2023/12/19	2026/12/18
DP test Cable	/	/	SHEM179-1	2024/12/18	2025/12/17
Test Software	ESE	e3	Version: 6.191211	N/A	N/A

<b>Voltage Fluctuations and Flicker</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Harmonic&Flicker analyzer	AMETEK	PACS-1	SHEM024-2	2024/07/31	2025/07/30
AC Power Source 5KVA	AMETEK	5001iX	SHEM025-2	2024/07/31	2025/07/30
Test Software	AMETEK	CTS4	Version: 4.24.0	N/A	N/A
Harmonic&Flicker analyzer	EM TEST	DPA500	SHEM024-1	2024/07/31	2025/07/30
AC Power Source 6KVA	EM TEST	ACS500	SHEM025-1	2024/07/31	2025/07/30
Test Software	EM TEST	DPA	Version: 5.4.8.0	N/A	N/A
Harmonic & Flicker test system	DEWETRON	DEWE2-A4	SHEM274-1	2024/07/31	2025/07/30

<b>Electrostatic Discharge</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Electrostatic Discharge Simulator	TESEQ	NSG 437	SHEM041-2	2024/07/31	2025/07/30
Electrostatic Discharge Simulator	3CTEST	EDS20H	SHEM199-1	2024/12/18	2025/12/17
Electrostatic discharge simulator	EM TEST	dito	SHEM289-1	2025/02/10	2026/02/09

<b>Radiated Immunity (80MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2024/12/18	2025/12/17
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2024/07/31	2025/07/30
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-4	2024/07/31	2025/07/30
Antenna	SCHWARZBECK	STLP9128D	SHEM130-1	N/A	N/A
Amplifier	MILMEGA	80RF1000-250	SHEM132-1	2024/12/18	2025/12/17
Power meter sensor	Rohde & Schwarz	NRP-Z22	SHEM136-1	2024/07/31	2025/07/30
ElectroMagnetic Field Probe	ETS-Lindgren	HI-6105	SHEM134-1	2024/08/16	2025/08/15
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023/05/06	2026/05/05
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-5	2024/12/18	2025/12/17

<b>Electrical Fast Transients Burst at AC Mains Power Port</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2024/07/31	2025/07/30
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2024/07/31	2025/07/30
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2024/09/27	2025/09/26
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2024/09/27	2025/09/26

<b>Surge at AC Mains Power Port</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2024/07/31	2025/07/30
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2024/07/31	2025/07/30
EFT & Surge Generator	PRIMA	PRM61045TB	SHEM200-1	2024/09/27	2025/09/26
CDN for EFT & Surge	PRIMA	PRM-CDN	SHEM200-2	2024/09/27	2025/09/26
CDN for unsymmetrical interconnection lines (1.2/50us)	SCHAFFNER	CDN 117	SHEM224-5	2024/07/31	2025/07/30
CDN for symmetric datalines & Resistor network (Surge 1.2/50 or 10/700 us)	SCHAFFNER	CDN 118 & INA172	SHEM224-6 & SHEM224-7	2024/07/31	2025/07/30

<b>Conducted Immunity at AC Mains Power Port (150kHz-80MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Signal generator	Rohde & Schwarz	SMB100A	SHEM194-1	2024/12/18	2025/12/17
Power Amplifier	HAEFFLY	PAMP250	SHEM023-1	2024/12/18	2025/12/17
6dB Attenuator	HUAXIANG	DTS50-6dB-1G-A	SHEM123-2	2024/12/18	2025/12/17
Power Meter	Rohde & Schwarz	NRP	SHEM057-1	2024/07/31	2025/07/30
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-4	2024/07/31	2025/07/30
Coupling and Decoupling Network (CDN)	LUTHI	L-801 M2/M3	SHEM023-6	2024/12/18	2025/12/17
Shielding Room	ZHONGYU	5*3*3M	SHEM079-6	2022/12/20	2025/12/19
Coupling and Decoupling Network	Teseq	CDN M016	SHEM168-1	2024/07/31	2025/07/30
Test Software	Rohde & Schwarz	EMC32	Version: 10.20.01	N/A	N/A
CDN	TESEQ	CDN M532	SHEM250-3	2024/12/18	2025/12/17
Power meter sensor	Rohde & Schwarz	NRP-Z91	SHEM057-5	2024/12/18	2025/12/17
Current Injection Probe	PRANA	IP-DR250	SHEM273-1	2024/12/18	2025/12/17
Test System for Conducted Immunity	TESEQ	NSG 4070	SHEM295-1	2024/12/18	2025/12/17

<b>Voltage Dips and Interruptions</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Immunity Test System	EMC PARTNER	TRA3000 F-S-D-V	SHEM163-1	2024/12/18	2025/12/17
Test Software	EMC-PARTNER	GENECS	Version: 3.29	N/A	N/A
Immunity Test System	TESEQ	NSG 3060	SHEM224-1	2024/07/31	2025/07/30
Coupling / Decoupling Network (CDN)	TESEQ	CDN 3061	SHEM224-3	2024/07/31	2025/07/30
Manual step transformer	TESEQ	INA 6501	SHEM224-4	2024/07/31	2025/07/30
3 phase voltage dips & interruptions simulator	LIONCEL	VDS-1132A & TGL-332	SHME143-1~SHME143-4	2024/05/06	2025/05/05

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Atmospheric Pressure Meter	Nanjing XiangRuiDe	DYM3	SHEM082-2	2024-01-18	2027-01-17
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-9~10	2024-12-22	2025-12-21
Temperature&humidity recorder	ShangHai weather meter work	ZJ 1-2B	SHEM042-5	2024-07-13	2025-07-12
Digital Temperature& humidity recorder	Jianda Renke	RS-WS-N01-6J	SHEM247-1~8	2025-01-06	2026-01-05
Digital Multimeter	FLUKE	17B+	SHEM271-7	2024-07-13	2025-07-12
Autoformer regulator	Guangzhou bao de	TDGC2-5KVA	SHEM150-1	N/A	N/A
Multi-purpose tong tester	FLUKE	317	SHEM001-2	2024-10-30	2025-10-29

## 6 Emission Test Results

### 6.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement: EN IEC 55014-1: 2021  
 Test Method: CISPR 16-2-1:2014+A1:2017

Limit:

0.15M-0.5MHz	66dB(μV)-56dB(μV) quasi-peak, 59dB(μV)-46dB(μV) average
0.5M-5MHz	56dB(μV) quasi-peak, 46dB(μV) average
5M-30MHz	60dB(μV) quasi-peak, 50dB(μV) average
Detector:	Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz


#### 6.1.1 E.U.T. Operation

Operating Environment:  
 Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

#### 6.1.3 Test Setup Diagram

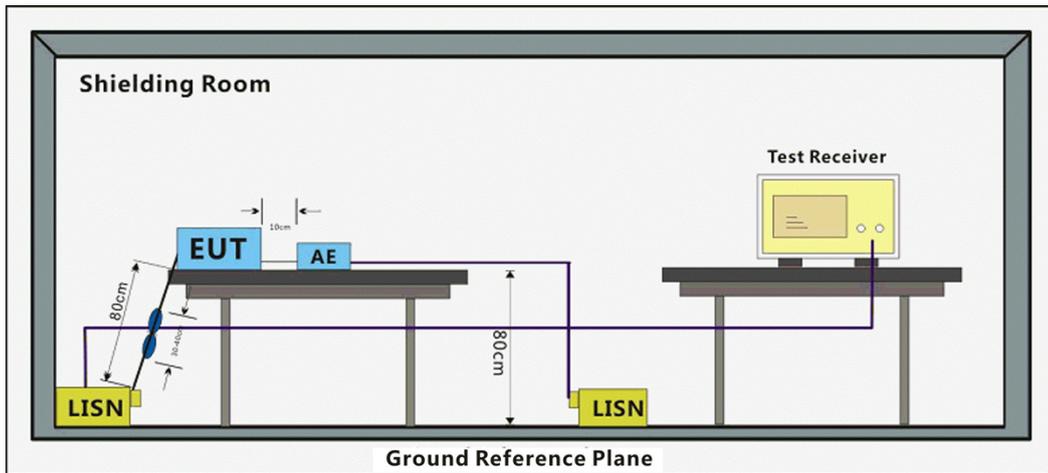


#### 6.1.4 Measurement Procedure and Data

Frequency Range: 150kHz to 30MHz

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. The red line show in graphic is the limit in standard used in this section.

Measured Level = Read level + Cable Loss + LISN Factor

Test Mode: 00; Line: Live line

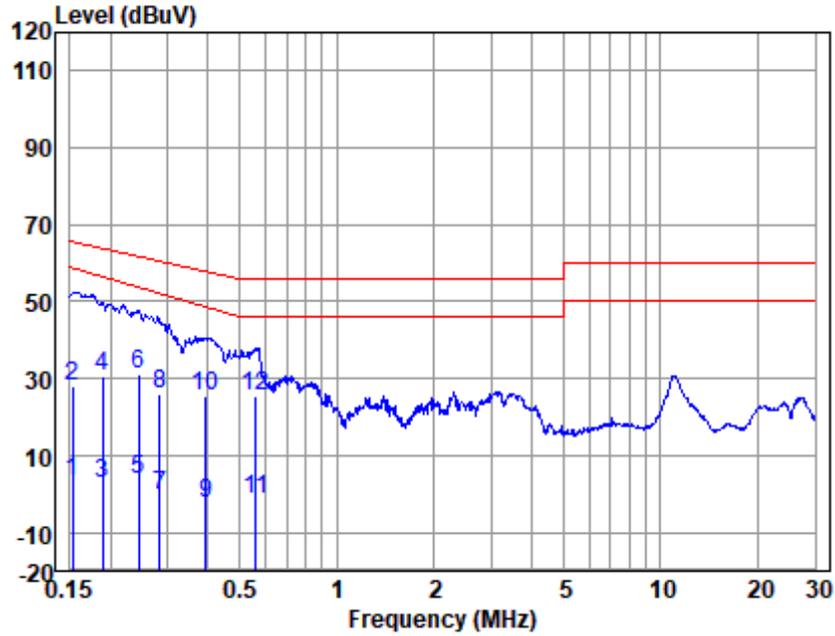


LISN : LINE  
 EUT/Project No : 1216HS  
 Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.15	-6.91	0.50	9.90	3.49	58.83	-55.34	Average
2	0.15	17.76	0.50	9.90	28.16	65.87	-37.71	QP
3	0.19	-7.90	0.50	9.90	2.50	56.48	-53.98	Average
4	0.19	20.48	0.50	9.90	30.88	64.06	-33.18	QP
5	0.24	-6.61	0.46	9.90	3.75	53.74	-49.99	Average
6	0.24	20.77	0.46	9.90	31.13	61.95	-30.82	QP
7	0.28	-10.53	0.42	9.90	-0.21	52.13	-52.34	Average
8	0.28	15.57	0.42	9.90	25.89	60.72	-34.83	QP
9	0.39	-12.55	0.35	9.90	-2.30	48.59	-50.89	Average
10	0.39	15.06	0.35	9.90	25.31	57.99	-32.68	QP
11	0.56	-11.82	0.30	9.90	-1.62	46.00	-47.62	Average
12	0.56	15.31	0.30	9.90	25.51	56.00	-30.49	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

Test Mode: 00; Line: Neutral Line

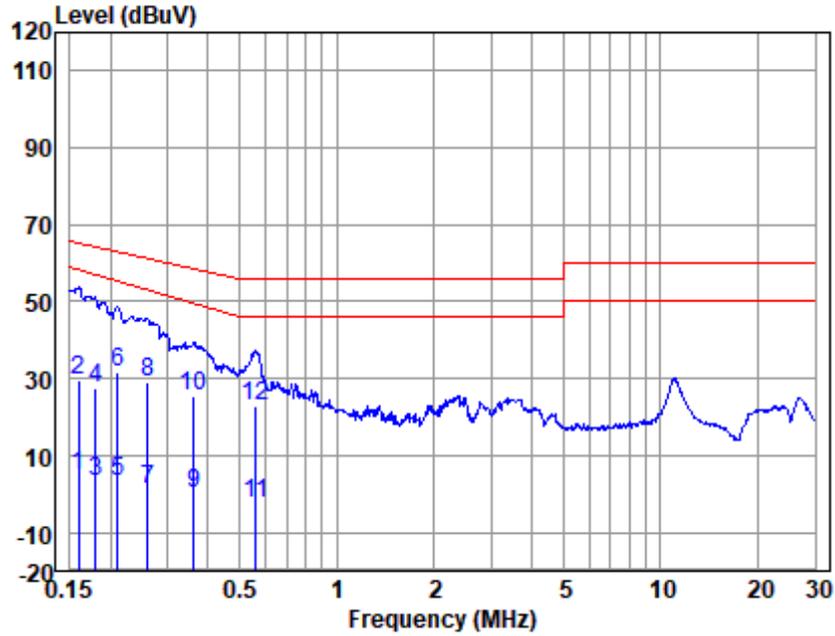

LISN : NEUTRAL  
 EUT/Project No : 1216HS  
 Test Mode : 00

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
1	0.16	-5.37	0.43	9.90	4.96	58.37	-53.41	Average
2	0.16	19.01	0.43	9.90	29.34	65.52	-36.18	QP
3	0.18	-6.87	0.42	9.90	3.45	57.05	-53.60	Average
4	0.18	17.06	0.42	9.90	27.38	64.50	-37.12	QP
5	0.21	-7.19	0.40	9.90	3.11	55.34	-52.23	Average
6	0.21	21.45	0.40	9.90	31.75	63.18	-31.43	QP
7	0.26	-9.15	0.40	9.90	1.15	53.05	-51.90	Average
8	0.26	18.84	0.40	9.90	29.14	61.42	-32.28	QP
9	0.36	-10.17	0.40	9.90	0.13	49.50	-49.37	Average
10	0.36	15.26	0.40	9.90	25.56	58.69	-33.13	QP
11	0.56	-12.55	0.37	9.90	-2.28	46.00	-48.28	Average
12	0.56	12.52	0.37	9.90	22.79	56.00	-33.21	QP

Notes: Emission Level = Read Level + LISN Factor + Cable loss

### 6.2 Disturbance Power

Test Requirement: EN IEC 55014-1: 2021

Test Method: CISPR 16-2-2:2010

Limit:

30MHz- 300MHz: 45dB(pW)-55dB(pW) quasi-peak, 35dB(pW)-45dB(pW) average

200MHz- 300MHz: 0dB(pW)-10dB(pW) quasi-peak (reduction limit)

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to 300MHz

#### 6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

#### 6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

#### 6.2.3 Test Setup Diagram

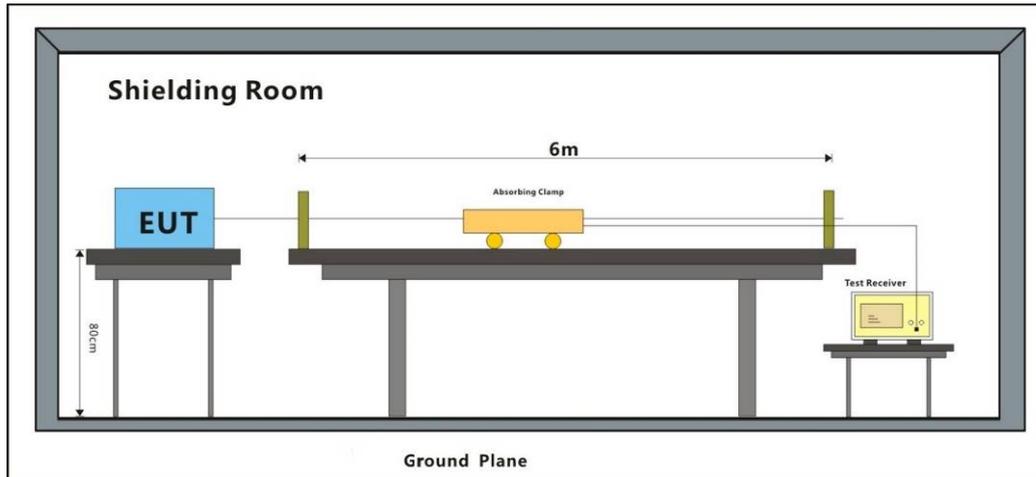


#### 6.2.4 Measurement Procedure and Data

Frequency Range: 30MHz to 300MHz

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. The red line show in graphic is the limit in standard used in this section.

Measured Level = Read level + Cable Loss + Clamp Factor

Test Mode: 00

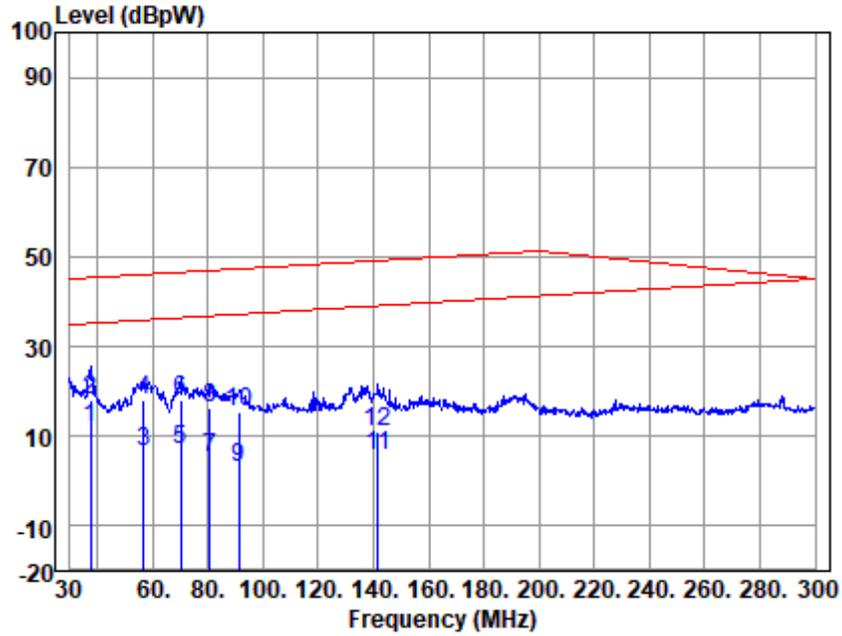

EUT/Project No : 1216HS

Test Mode : 00

	Freq (MHz)	Read level (dBpW)	Aux Factor (dB)	Cable Loss (dB)	Emission Level (dBpW)	Limit (dBpW)	Over Limit (dB)	Remark
1	37.56	-12.92	18.15	6.75	11.98	35.29	-23.31	Average
2	37.56	-6.69	18.15	6.75	18.21	45.29	-27.08	QP
3	56.73	-17.58	17.13	6.97	6.52	36.00	-29.48	Average
4	56.73	-6.10	17.13	6.97	18.00	46.00	-28.00	QP
5	69.96	-17.34	17.10	7.10	6.86	36.49	-29.63	Average
6	69.96	-6.19	17.10	7.10	18.01	46.49	-28.48	QP
7	80.49	-19.39	17.38	7.21	5.20	36.88	-31.68	Average
8	80.49	-8.40	17.38	7.21	16.19	46.88	-30.69	QP
9	91.02	-21.18	17.11	7.31	3.24	37.27	-34.03	Average
10	91.02	-8.96	17.11	7.31	15.46	47.27	-31.81	QP
11	141.78	-18.73	16.62	7.74	5.63	39.15	-33.52	Average
12	141.78	-13.24	16.62	7.74	11.12	49.15	-38.03	QP

Notes: Emission Level = Read Level + Aux Factor + Cable loss

### **6.3 Harmonic Current Emission**

Test Requirement: EN IEC 61000-3-2: 2019+A1:2021+A2:2024

Test Method: EN IEC 61000-3-2: 2019+A1:2021+A2:2024

Remark: N/A

There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN IEC 61000-3-2: 2019+A1:2021.

For further details, please refer to Clause 7 of EN IEC 61000-3-2 which states:

“For the following categories of equipment, limits are not specified in this standard.

- equipment with a rated power of 75W or less, other than lighting equipment”

### 6.4 Voltage Fluctuations and Flicker

Test Requirement: EN 61000-3-3: 2013+ A1:2019+A2:2021

Test Method: EN 61000-3-3: 2013+ A1:2019+A2:2021

#### 6.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C      Humidity: 50 % RH      Atmospheric Pressure: 1010 mbar

#### 6.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

#### 6.4.3 Test Setup Diagram

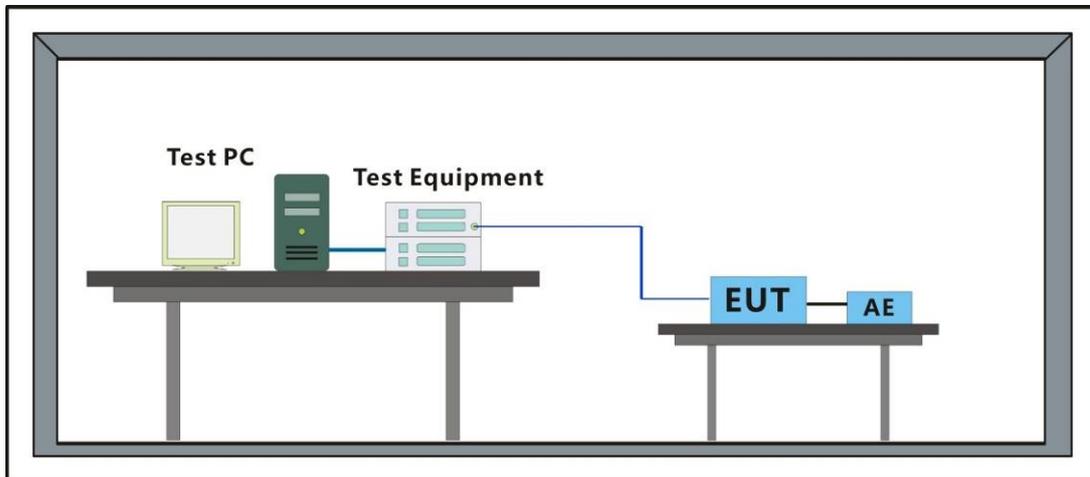

#### 6.4.4 Measurement Procedure and Data

Test Mode:00

Vrms at the end of test (Volt):	230.06		
T-max (mS):	0	Test limit (mS):	500.0      Pass
Highest dc (%):	0.13	Test limit (%):	3.30      Pass
Highest dmax (%):	0.69	Test limit (%):	4.00      Pass
Highest Pst (10 min. period):	0.216	Test limit:	1.000      Pass
Highest Plt (2 hr. period):	0.196	Test limit:	0.650      Pass

## 7 Immunity Test Results

### Performance Criteria Description


- Criterion A:** The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- Criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and from what the user may reasonably expect from the apparatus if used as intended.
- Criterion C:** Temporary loss of function is allowed, provided the function is self recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

## 7.1 Electrostatic Discharge

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN 61000-4-2:2009

### 7.1.1 Test Setup Diagram

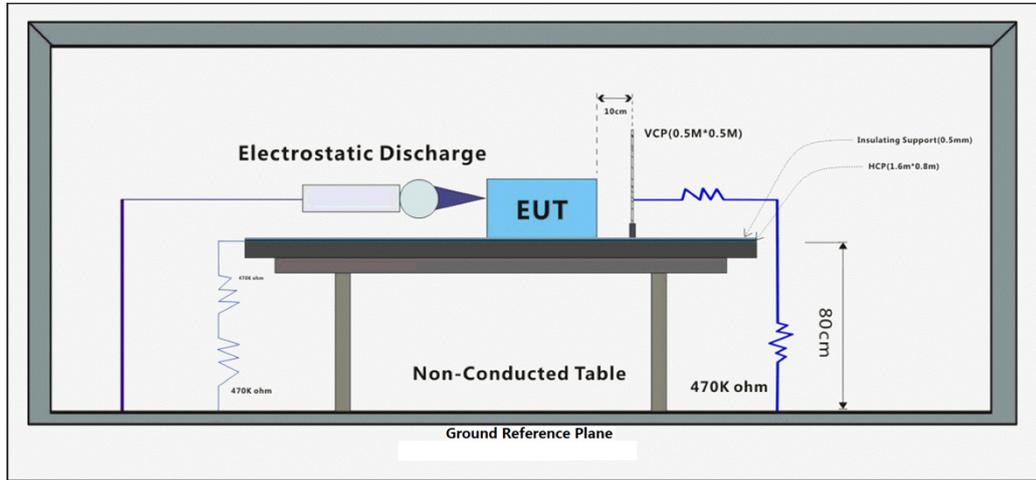

### 7.1.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

### 7.1.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

### 7.1.4 Test Condition and Results:

Performance Criterion: B

Discharge Impedance: 330 Ω / 150 pF

Discharge Voltage: Air Discharge: 8 kV; Contact Discharge: 4 kV; VCP/HCP: 4 kV.

Polarity: Positive & Negative

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge

Discharge Period: 1 second minimum

Test Point 1: All insulated enclosure & seams.

Test Point 2: All accessible metal parts of the enclosure.

Test Point 3: All sides.


Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	8	+	1	A
Air Discharge	8	-	1	A
Contact Discharge	4	+	2	A
Contact Discharge	4	-	2	A
Horizontal Coupling	4	+	3	A
Horizontal Coupling	4	-	3	A
Vertical Coupling	4	+	3	A
Vertical Coupling	4	-	3	A
A: No degradation in the performance of the EUT was observed				

### 7.2 Radiated Immunity (80MHz-1GHz)

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN IEC 61000-4-3: 2020

#### 7.2.1 Test Setup Diagram

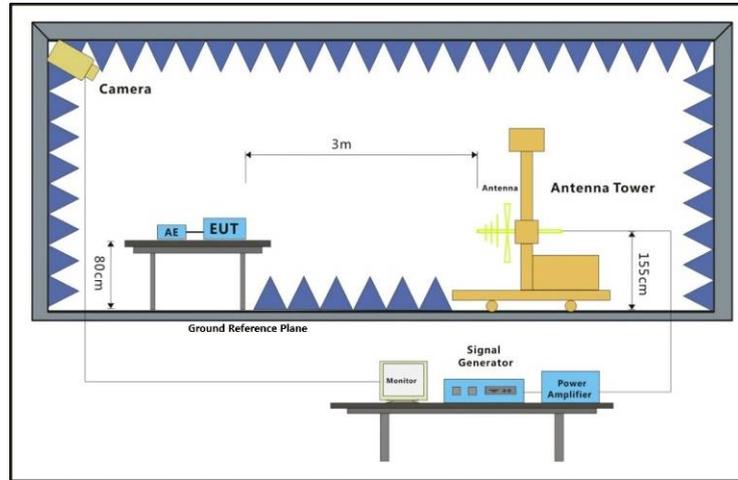

#### 7.2.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

#### 7.2.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

#### 7.2.4 Test Condition and Results:

Performance Criterion: A

Frequency Range: 80MHz to 1GHz

Antenna Polarisation: Vertical and Horizontal

Modulation 1kHz, 80% Amp. Mod, 1% increment

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-1GHz	3	Front	3s	A
80MHz-1GHz	3	Back	3s	A
80MHz-1GHz	3	Left	3s	A
80MHz-1GHz	3	Right	3s	A


A: No degradation in the performance of the EUT was observed

### 7.3 Electrical Fast Transients Burst at AC Mains Power Port

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN 61000-4-4:2012

#### 7.3.1 Test Setup Diagram

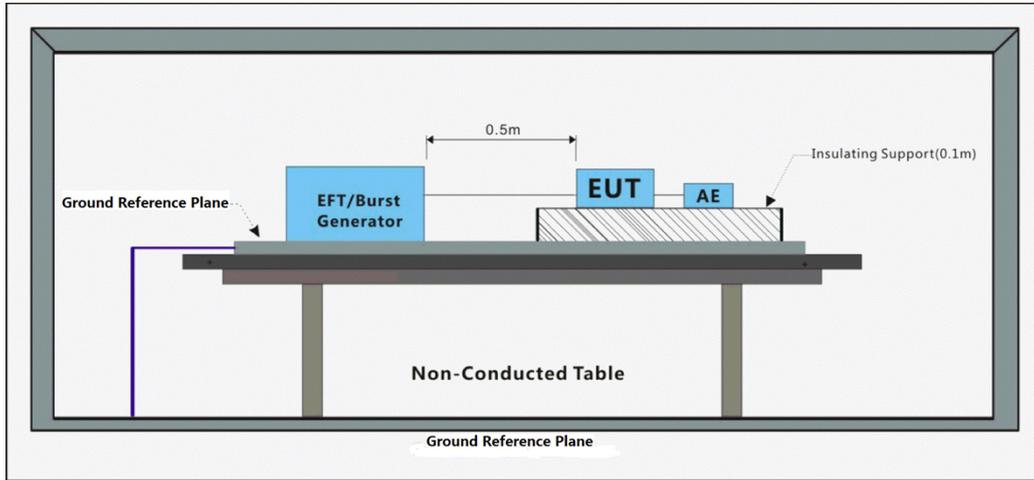

#### 7.3.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

#### 7.3.4 Test Condition and Results:

Performance Criterion: B

Repetition Frequency: 5kHz

Burst Period: 300ms

Test Duration: 2 minute per level & polarity

Test Level: 1.0kV

Polarity: Positive & Negative

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
AC power port	1	+	CDN	A
AC power port	1	-	CDN	A


A: No degradation in the performance of the EUT was observed

## 7.4 Surge at AC Mains Power Port

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN 61000-4-5:2014+A1:2017

### 7.4.1 Test Setup Diagram

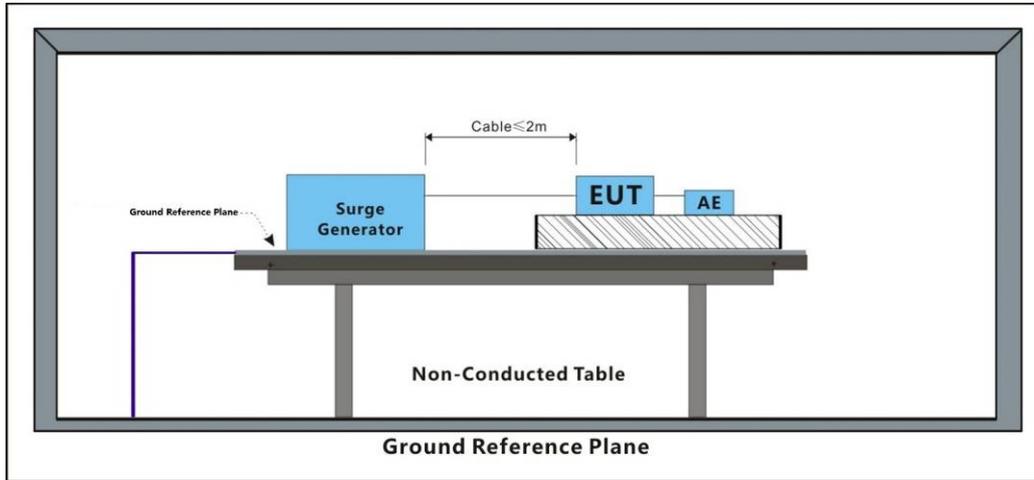

### 7.4.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

### 7.4.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

### 7.4.4 Test Condition and Results:

Performance Criterion: B

Interval: 60s between each surge

Test Level: ±1kV Live to Neutral; ±2kV Live, Neutral to Earth

Polarity: Positive & Negative

Generator source impedance: 2Ω

CDN coupling impedance(Line-to-ground):10Ω

Trigger Mode: Internal

No. of surges: 5 positive at 90°, 5 negative at 270°.

Test Line	Level (kV)	Polarity	Phase (deg)	Result / Observations
L-N	1	+	90°	A
L-N	1	-	270°	A


A: No degradation in the performance of the EUT was observed

## 7.5 Conducted Immunity at AC Mains Power Port (150kHz-80MHz)

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN 61000-4-6: 2014

### 7.5.1 Test Setup Diagram

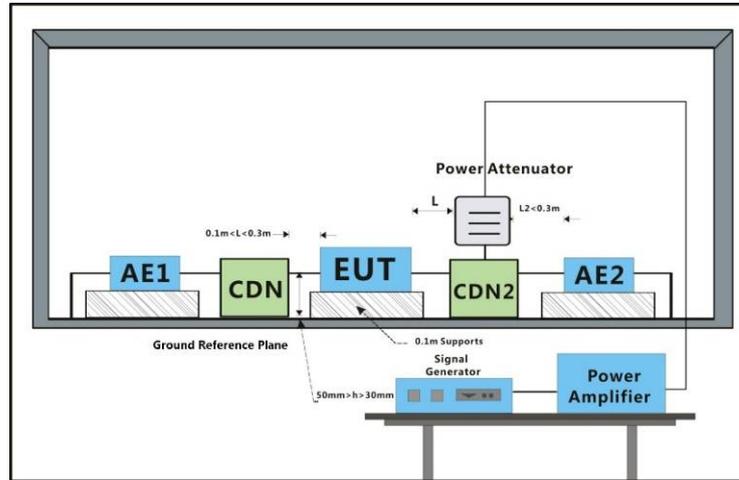

### 7.5.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

### 7.5.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

### 7.5.4 Test Condition and Results:

Performance Criterion: A

Step Size: 1%

Frequency Range: 0.15MHz to 80MHz

Modulation: 80%, 1kHz Amplitude Modulation


Cable Port	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
AC power port	3	CDN	3s	A
A: No degradation in the performance of the EUT was observed				

## 7.6 Voltage Dips and Interruptions

Test Requirement: EN IEC 55014-2: 2021

Test Method: EN IEC 61000-4-11: 2020

### 7.6.1 Test Setup Diagram

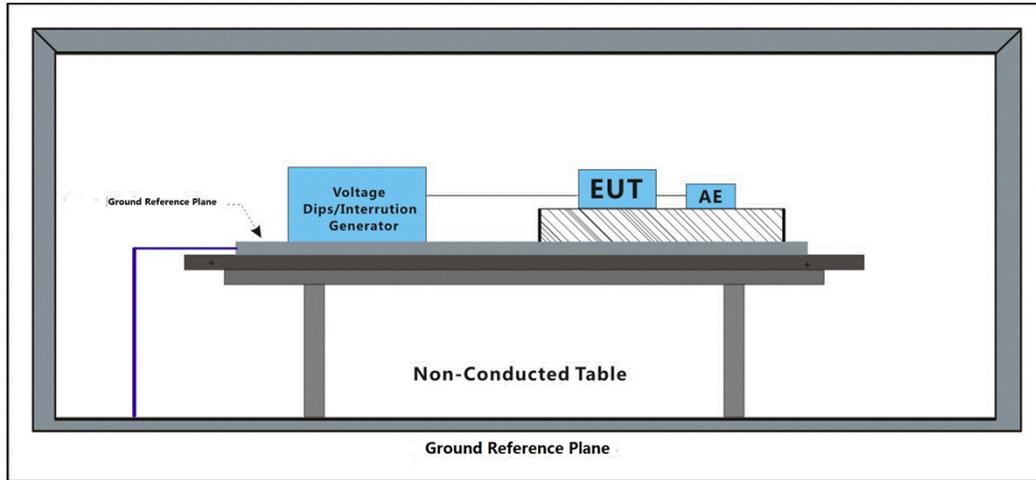

### 7.6.2 E.U.T. Operation

Operating Environment:

Temperature: 22 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

### 7.6.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Keep EUT running continual.

### 7.6.4 Test Condition and Results:

Performance Criterion:

For 50Hz: 0% of UT (Rated Voltage) for 0.5 Cycle: C; 40% of UT for 10 Cycles: C; 70% of UT for 25 Cycles: C.

For 60Hz: 0% of UT (Rated Voltage) for 0.5 Cycle: C; 40% of UT for 12 Cycles: C; 70% of UT for 30 Cycles: C.

No. of Dips / Interruptions: 3 per Level

Time between dropout: 10s

Level % UT	Phase (deg)	Duration	No. of Dips / Interruptions	Result / Observations
0	0°	0.5 Cycle for 50Hz	3	A
0	180°	0.5 Cycle for 50Hz	3	A
40	0°	10 Cycles for 50Hz	3	A
40	180°	10 Cycles for 50Hz	3	A
70	0°	25 Cycles for 50Hz	3	A
70	180°	25 Cycles for 50Hz	3	A
0	0°	0.5 Cycle for 60Hz	3	A
0	180°	0.5 Cycle for 60Hz	3	A
40	0°	12 Cycles for 60Hz	3	A
40	180°	12 Cycles for 60Hz	3	A
70	0°	30 Cycles for 60Hz	3	A
70	180°	30 Cycles for 60Hz	3	A

A: No degradation in the performance of the EUT was observed

## 8 Test Setup Photo

### Conducted Emissions at AC Mains Power Port (150kHz-30MHz)



### Disturbance Power



### Voltage Fluctuations and Flicker



### Electrostatic Discharge



### Radiated Immunity (80MHz-1GHz)



### Electrical Fast Transients Burst at AC Mains Power Port



**Surge at AC Mains Power Port**



**Conducted Immunity at AC Mains Power Port (150kHz-80MHz)**



## Voltage Dips and Interruptions





## 9 EUT Constructional Details (EUT Photos)







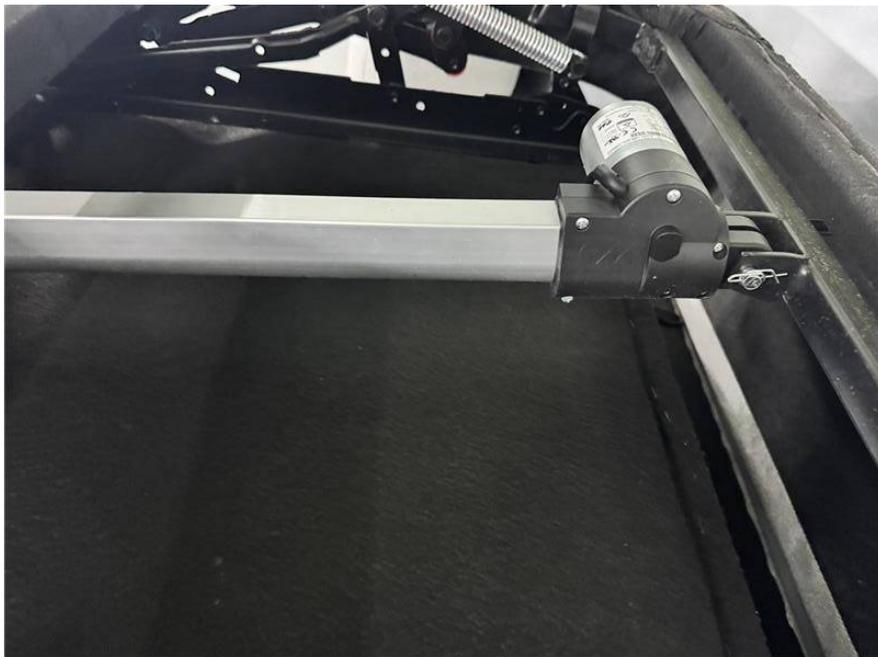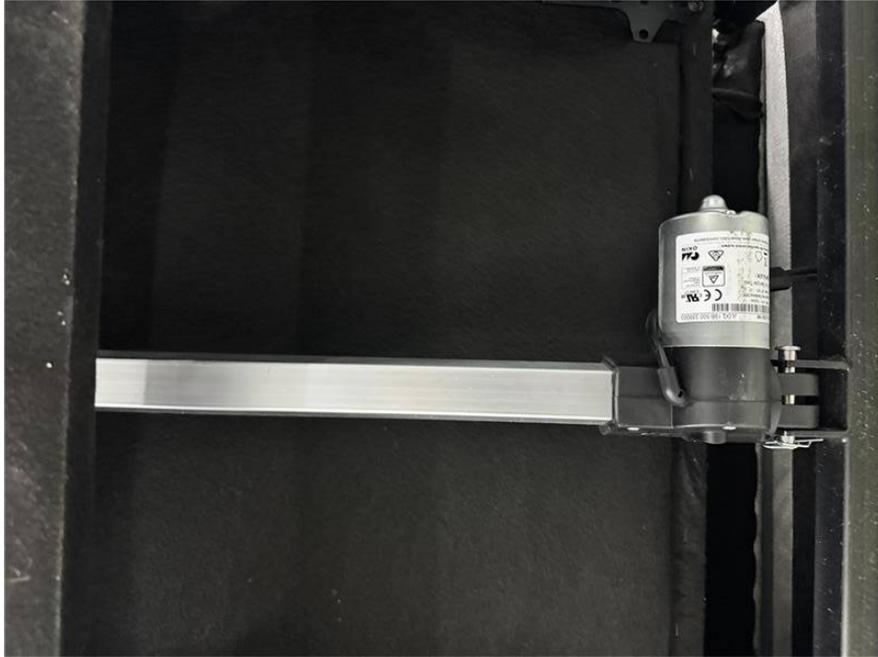









- End of the Report -