

Test Report

No.SDHL2402002176FT

Date: Feb 19, 2024

Page 1 of 3

DOREL HOME FURNISHINGS EUROPE LTD
BUILDING 4, IMPERIAL PLACE, MAXWELL ROAD, BOREHAMWOOD, HERTFORDSHIRE. WD6 1JN

Sample Description : UKFR - VELVET BLACK (CR007)
Client Reference Information : Ref. No/Item No.(USED FOR): 2351079CLUK,2358079NUK,2319079UK,
2005019UK,2363079AUK,2363079BUK
Labeled age grading : ADULT
Buyer : DOREL HOME FURNISHINGS EUROPE LTD
Manufacturer : JIAXING ANYEE INTELLIGENT FURNITURE CO., LTD.
Supplier : TONGXIANG QIJUN TEXTILE CO., LTD
Country of Origin : CHINA
Country of Destination : UNITED KINGDOM

As above test item and its relevant information regarding to the submission are provided and confirmed by the applicant. SGS is not liable to either the test item or its relevant information, in terms of the accuracy, suitability, reliability or/and integrity accordingly.

SGS Ref No. : SDFS2402000830FF
Sample Receiving Date : Feb 01, 2024
Test Performing Date : Feb 01, 2024 to Feb 18, 2024
Test Performed : Selected test(s) as requested by applicant

Test Result Summary

No.	Test(s) Requested	Result(s)	Comments
1	Schedule 4 Part I and Schedule 5 Part I of Furniture and Furnishings (Fire) (Safety) Regulations 1988 With Amendments In 1989, 1993 and 2010 of United Kingdom	PASS	/
For further details, please refer to the following page(s)			

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch

Marco Leung

Marco Leung
Authorized Signatory

Scan to see the report



SDHL2402002176FT
Verification:
check.sgschina.com.cn



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.sgschina.com.cn
中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

Test Conducted:

The Test, Specified in Schedule 4 Part I and Schedule 5 Part I of the Furniture and Furnishings (Fire) (Safety) Regulations, is based on BS 5852: Part 1: 1979.

To assess the ignitability of visible cover used in upholstered components when subjected to ignition **source 0 and 1**.

General Information:

Materials	Fabric	Weight	396 g/m ²
Soaking Condition:	☒ YES (BS5651,specified in UK Regulations)		
Precondition	Indoor Ambient Condition		72 h
Conditioning of Test Specimen and Ignition Source(s)	Temperature: (23±2) °C;Relative Humidity: (50±5) % Duration:24 h;		
Testing Enclosure (fume cupboard / room)	22.2 °C	RH 54 %	---

Test Results:

The following test results relate only to the ignitability of the combination of materials under the particular condition of test. They are not intended as a means of assessing the full potential fire hazard of the materials or products in use.

(A) Smoldering Cigarette Test (ignition source 0)

Criteria	1 st test	2 nd test
9.2.3) Whether the evidence of progressive smouldering or flaming is observed in the interior and/or cover	NO	NO
9.2.4) Whether progressive smouldering or flaming of the sample is observed at any time within one hour of placement of the cigarette	NO	NO
9.2.5) Whether progressive smouldering is observed on final examination when dismantle assembly and examine internally	NO	NO

Test Details:

The filling material for Schedule 4 Part I was non-fire retardant polyurethane foam corresponding to the specification set out in BS 3379 Type B Hardness grade 130 and of a density of 20-22 kg per m³.

Test	Ignition Source	Time to extinction after placement of the cigarette		
		Progressive Smouldering Time(second)	Flame Ceased Time(second)	Smoking Ceased Time
1 st	0	0	0	17min39s
2 nd	0	0	0	18min24s

Sub-Conclusion: PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 1-2/F., Building 1, European Industrial Park, No.1, Shunhe South Road, Wusha, Daliang, Shunde District, Foshan, Guangdong, China 528300 t (86-757)22805888 www.ssgsgroup.com.cn
 中国·广东·佛山市顺德区大良街道办事处五沙社区居民委员会顺和南路1号欧洲工业园一号厂房首层、二层 邮编: 528300 t (86-757)22805888 sgs.china@sgs.com

(B) Butane Flame Test (ignition source 1)

Criteria	1 st test	2 nd test
9.3.4) Whether the evidence of flaming or progressive smouldering in the interior and/or cover is observed beyond 120s of the removal of the burner tube	NO	NO
9.4) Whether progressive smoldering is observed on final examination when dismantle assembly and examine internally	NO	NO

Test Details:


The filling material for Schedule 5 Part I was non-fire retardant polyurethane foam corresponding to the specification set out in BS 3379 Type B Hardness grade 130 and of a density of 20-22 kg per m³.

Test	Ignition Source	Ignition Time	Time to Extinction after Removal of the Burner(second)	
			Flame Ceased Time	Smoking Ceased Time
1 st	1	(20±1)s	0	17
2 nd	1	(20±1)s	5	21

Sub-Conclusion: PASS

Note: This document cannot be reproduced except full, without prior written approval of the Company.

Photo Appendix:

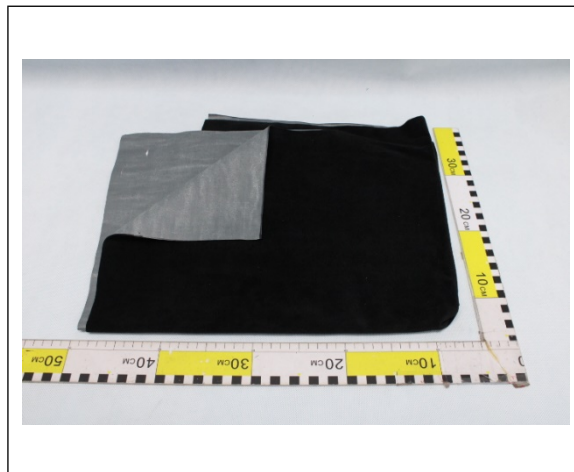

Remark: According to client's statements the tested samples are used in their products entitled as Ref. No/Item No. stated in "Client Reference Information" column on the first page.

End of Report

